


LAT-FBE

Low Application Temperature Fusion Bond Epoxy Powder Coating



ANTI-CORROSION

PRODUCT DATA SHEET

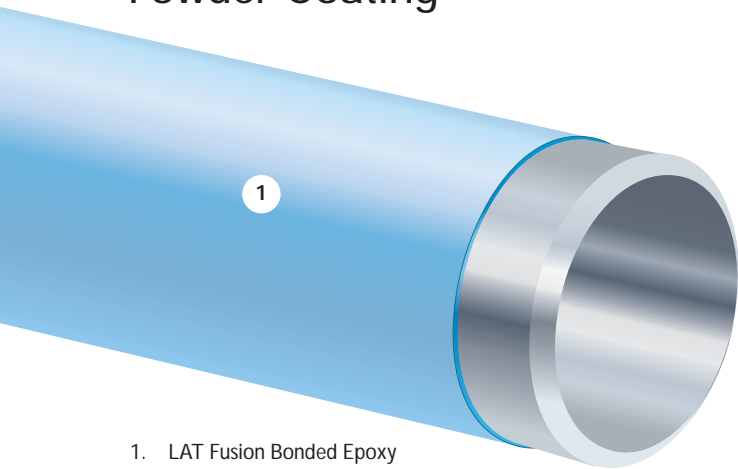

1. LAT Fusion Bonded Epoxy

Product Description

Low Application Temperature Fusion Bond Epoxy (LAT-FBE) is a plant applied powder coating for strain based pipeline designs that require a low application temperature. It is spray applied to hot rotating pipe by electrostatic charge. **This coating has high operating temperature capabilities, up to 110°C*, combined with superior handling characteristics especially on pipe above 16" outer diameter.**

** Dependent on soil and environment conditions*

Applications



Oil & Gas Pipelines



Small Diameter Pipelines



Large Diameter Pipelines



Waterworks Pipelines

Related Standards and Specifications

- CSA Z245.20
- GAZ de France R 09
- NF A 49 706
- AWWA C 213
- GBE/CW 6
- ISO 10080
- AS3862:2002
- NACE RP 0394
- ISO 9001:2008

For additional standards and specifications with which this product complies, please contact your Bredero Shaw representative. In Canada, consult Shaw Pipe.



Lower Application Temperature

- Applied at a much lower temperature (200°C) than conventional FBE (245°C).
- Maintains the exact mechanical properties of the steel as it was designed and can be used on high strength pipelines (eg: X80 - X120 steel pipe) through conventional terrain
- Used as an epoxy primer as part of a 3-layer system on high strength steel in tough terrain conditions.

Long term corrosion protection

- FBE's excellent adhesion to steel provides superior long term corrosion resistance and protection of pipelines operating at moderate temperatures for the designed life.
- The superior adhesion properties also provide excellent resistance to cathodic disbondment which reduces the total cost of cathodic protection during the operation of the pipeline.

Global Availability

- Bredero Shaw has a network coating plants strategically located around the world to minimize pipe transportation costs.
- LAT-FBE can be manufactured in a single plant or in multiple coating plants to improve project logistics.
- High capacity within the Bredero Shaw plant network allows the client to benefit from single source advantages, providing more cost effective management of pipe coating needs.

Features & Benefits

LAT-FBE


Low Application Temperature Fusion Bond Epoxy Powder Coating

Typical Plant Capabilities and Product Properties

Capability/Property	LAT-FBE
Minimum Pipe Diameter	90 mm (3.5")
Maximum Pipe Diameter	1220 mm (48")
Minimum Pipe Length	5.5 m (18')
Maximum Pipe Length.....	25 m (82')
Minimum Recommended Operating Temperature	-40°C (-40°F)
Maximum Recommended Operating Temperature	110°C (230°F)

Values shown are typical and may vary from plant to plant. Consult Bredero Shaw for special requirements. In Canada, consult Shaw Pipe. Soil type, moisture content, temperatures & coating thickness all influence the upper operating temperature limit as per manufacturers' published literature.

Product Application Process

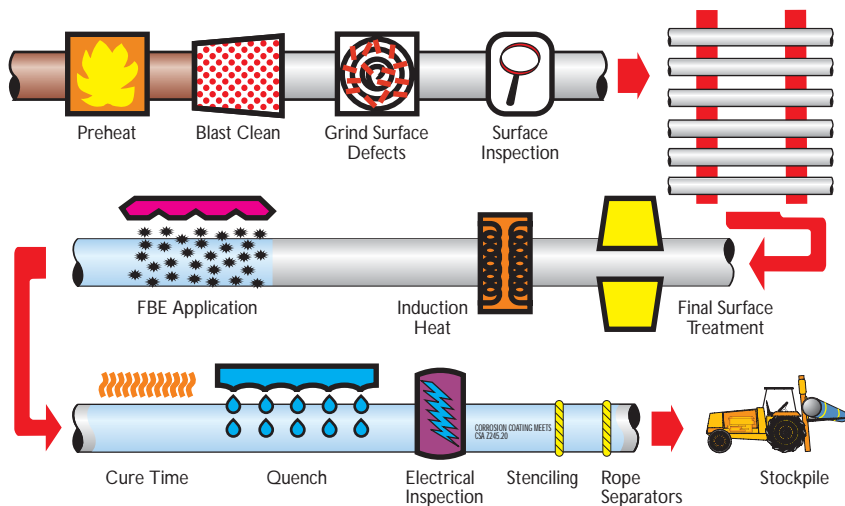

LAT/FBE_rev022

Plants

North America

Camrose, Alberta
Regina, Saskatchewan
Portland, Oregon
Fontana, California
Vineyard, Utah
Pearland, Texas

Latin America

Monterrey, Mexico
Veracruz, Mexico
Belo Horizonte, Brazil

EMAR

Leith, Scotland
Orkanger, Norway
Jubail, Saudi Arabia
Ras Al Khaimah, UAE

Asia Pacific

Rayong, Thailand
Kuantan, Malaysia
Kabil, Batam Island, Indonesia
Kembla Grange, Australia

About Bredero Shaw

Bredero Shaw is the global leader in pipe coating solutions. With more than 80 years of experience, the largest team of dedicated pipe coating professionals, the most extensive network of strategically located plants worldwide and with proven innovative coating technologies, the company has protected more pipelines in virtually every environment and operating condition than anyone in the industry.

Bredero Shaw offers technologically advanced solutions for anti-corrosion coatings, protective and weight coatings, thermal flow assurance coatings, internal coatings, custom coatings and field joints for both onshore and offshore applications. This broad range of products and services provides Bredero Shaw with the unique capability to service the full spectrum of pipeline protection and flow assurance requirements. Consult your Bredero Shaw representative for your unique project requirements.

HEAD OFFICE
Bredero Shaw
3838 N. Sam Houston Pkwy E.
Suite 300
Houston, Texas
77032-3400, USA
Phone: +1-281-886-2350
solutions@brederoshaw.com

NORTH AMERICA
Bredero Shaw
Two Executive Place,
200, 1824 Crowchild Trail, N.W.
Calgary, Alberta
T2M 3Y7, Canada
Phone: +1-403-263-2255
northamerica@brederoshaw.com

LATIN AMERICA
Bredero Shaw
3838 N. Sam Houston Pkwy E.
Suite 300
Houston, Texas
77032-3400, USA
Phone: +1-281-886-2350
latinamerica@brederoshaw.com

**EUROPE, MIDDLE EAST,
AFRICA & RUSSIA**
Bredero Shaw
Lakeside House
1 Furzeground Way
Stockley Park, Uxbridge
UB11 1BD
Phone: +44 (0) 208 622 3071
EMAR@brederoshaw.com

ASIA PACIFIC
Bredero Shaw
101 Thomson Road
#17-01/02 United Square
Singapore 307591
Phone: +65-6732-2355
asiapacific@brederoshaw.com

Regional Offices

The information contained herein is indicative of the types of coatings provided by Bredero Shaw, and is not intended to be a guarantee that a particular coating will be suitable for a given application. Since many unique environmental, operating, and design conditions must be considered, the user shall determine the suitability of the coating for the intended use and assume all the risks and liabilities in connection therewith. Bredero Shaw's liability is stated in our standard conditions of sale.